



# **EAGLE LINE TOOLS**

**1-800-710-2976**

**513-738-0229 FAX**

**[www.eaglelinetools.com](http://www.eaglelinetools.com)**



## **EAGLE LINE TOOLS**

### **Warranty Procedures**

#### **Limited Warranty**

EAGLE LINE TOOLS warrants to the original purchaser that the products sold by it will be free from defects in material and workmanship for a period of one year from the date of the original purchase. These goods must be installed, operated and used according to EAGLE LINE TOOLS written instructions. Normal wear and tear, damage from abuse, neglect or alterations of any kind are not covered under this warranty.

EAGLE LINE TOOLS liability for a failure of goods under this limited warranty, and for any and all claims arising out of the purchase and use of goods, shall be limited to the repair or replacement of the goods that do not conform to this warranty, and shall be in lieu of any other liability or remedy, including, without limitation, any causes of action in negligence and strict liability.

To obtain repair or replacement service under this limited warranty the purchaser must return the product to:

EAGLE LINE TOOLS  
7780 Willey Road  
Harrison, OH 45030  
Phone (800)-710-2976  
Fax (513)-738-0229

Any and all transportation charges must be prepaid by the original purchaser of the product(s).

Tools found to be defective will be replaced or repaired at no charge and returned. There are no express warranties covering these goods other than set forth above. EAGLE LINE TOOLS will in no event be responsible or liable for incidental or consequential damages.



## EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229



Inside Jaw  
Contour



### PG-1202 Wire Pulling Grip

- 4500 lb. Safe Load
- .20 - .40 Cable Dia.
- #6 ACSR - 1/0 ACSR
- Bare, ACSR, AAC & Stranded CU
- Jaw Contour: Double Round
- Jaw Length: 4"
- Weight: 3 lbs.



Inside Jaw  
Contour



### PG-1203 Wire Pulling Grip

- 4500 lb. Safe Load
- .31 - .53 Cable Dia.
- #2 ACSR - 4/0 ACSR
- Bare, ACSR, AAC & Stranded CU
- Jaw Contour: Double Round
- Jaw Length: 4 3/4"
- Weight: 3 3/4 lbs.



Inside Jaw  
Contour



### PG-1204 Wire Pulling Grip

- 8000 lb. Safe Load
- .53 - .74 Cable Dia.
- 4/0 ACSR - 336 ACSR
- Bare, ACSR, AAC & Stranded CU
- Jaw Contour: Double Round
- Jaw Length: 5 1/2"
- Weight: 7 1/2 lbs.



The PE-1 is made from ductile iron which makes it exceptionally strong. It has a safe load of 6000 lbs. and a minimum breaking strength of 30,000 lbs. The large offset eye allows for easy hookup with a 3 ton hoist. This allows for the attachment of dead end guying devices such as the automatic, preformed and other similar types. The grip can be adjusted to receive rod diameters ranging from 1/2" to 1" with the sliding wedge. If the wedge is removed it can receive a rod up to 1 1/4" in diameter. Weight: 5 lbs.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229



## PG-1302 Wire Pulling Grip

- Knurled Jaw Grip
  - 5000 lb. Safe Load
  - .125 (3.18mm) - .50 (12.70mm), Steel Strand
- Weight: 1 lb.



## PG-1302L Wire Pulling Grip

- Knurled Jaw Grip with Latch
  - 5000 lb. Safe Load
  - .125 (3.18mm) - .50 (12.70mm), Steel Strand
- Weight: 2 1/2 lbs.



Inside Jaw  
Contour



## PG-1702 Wire Pulling Grip

- Solid and Stranded Bare Wire
  - 1500 lb. Safe Load
  - .08 (2.03mm) - .20 (5.08mm)
  - Jaw Contour: Single 'V'
  - Jaw Length: 3"
- Weight: 1 1/2 lbs.



Inside Jaw  
Contour



## PG-1704 Wire Pulling Grip

- Conductor & Guy Strand Grip
  - 4500 lb. Safe Load
  - .12 (3.05mm) - .37 (9.40mm)
  - Jaw Contour: Double 'V'
  - Jaw Length: 4 3/4"
- Weight: 3 lbs.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229



Inside Jaw  
Contour



## PG-1402 Wire Pulling Grip

- Wide Range Parallel-Jaw
- 4500 lb. Safe Load
- .157 (4mm) - .886 (22mm)
- Pulls a wide range of cable sizes and types
- Protective latch to hold grip on cable
- Large Diameter eye accepts large hooks on hoist, winches and tackle blocks
- Jaw Contour: Double Round
- Jaw Length: 2.36"
- Weight: 3 lbs.



Inside Jaw  
Contour



## PG-1403 Wire Pulling Grip

- Wide Range Parallel-Jaw
- 7500 lb. Safe Load
- .625 (16mm) - 1.25 (32mm)
- Protective latch to hold grip on cable
- Large Diameter eye accepts large hooks on hoist, winches and tackle blocks
- Jaw Contour: Double Round
- Jaw Length: 4 1/2"
- Weight: 5 lbs.



Inside Jaw  
Contour



## PG-1507 Wire Pulling Grip

- EHS Grip
- 8000 lb. Safe Load
- .218 (5.54mm) - .55 (13.97mm)
- Jaw Contour: Double 'V'
- Jaw Length: 5"
- Weight: 6 1/4 lbs.



Inside Jaw  
Contour



## PG-1804 Wire Pulling Grip

- Wide Range Parallel-Jaw Grip
- 5000 lb. Safe Load
- .18 (4.5mm) - .6 (15mm), #6 to 4/0
- Jaw Contour: Double Round
- Jaw Length: 4"
- Weight: 3 1/4 lbs.



Inside Jaw  
Contour



## PG-1806 Wire Pulling Grip

- Wide Range Parallel-Jaw Grip
- 12,000 lb. Safe Load
- .70 (17.78mm) - 1.25 (31.75mm)
- Jaw Contour: Double Round
- Jaw Length: 5 3/4"
- Weight: 8 lbs.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## HANDLINE BLOCKS


4 POPULAR MODELS TO CHOOSE FROM



**HLB-1000**

- Latch Hook for multiple applications.

- 1,000 lb. Working Load
- Safety Orange Color
- Fiberglass reinforced nylon construction
- Opening body design for easy rigging

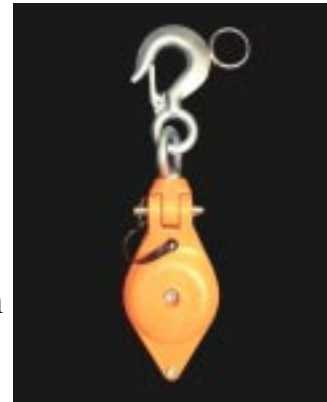

**HLB-1000HS**

- Eye for use with Hot Sticks.

- 3" sheave, 5/8" rope capacity
- Pull pin w/ detent ball for easy opening/securing
- Swivel eye allows 360 degree rotation
- Weight: 1 1/2 - 2 lbs.



**HLB-1000NH**

- No Hook for special applications.



**HLB-1000MH**

- Meat Hook

### REPLACEMENT PARTS

LATCH KIT

**HLB-003**

Includes spring, latch, & screw.

PIN KIT

**HLB-002**

Includes pin lanyard.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## COMPLETE HANDLINES



1/2" Polypropylene Twisted Rope

Catalog #	Description
HL-60T	60' in length
HL-80T	80' in length
HL-100T	100' in length
<b>* CUSTOM LENGTHS ALSO AVAILABLE</b>	

\* Includes HL-7 (Handline Hook), HL-1 (Snap Hook), HLB-1000 (Handline Block)



1/2" Yale Polyale Plus™, Single Braid Rope

Catalog #	Description
HL-60B	60' in length
HL-80B	80' in length
HL-100B	100' in length
<b>* CUSTOM LENGTHS ALSO AVAILABLE</b>	

\* Includes HL-7 (Handline Hook), HL-1 (Snap Hook), HLB-1000 (Handline Block)

[www.eaglelinetools.com](http://www.eaglelinetools.com)





# EAGLE LINE TOOLS


800-710-2976

fax 513-738-0229



## HL-NR-A

Slack Block Set with Forged Hook  
\*Without Rope

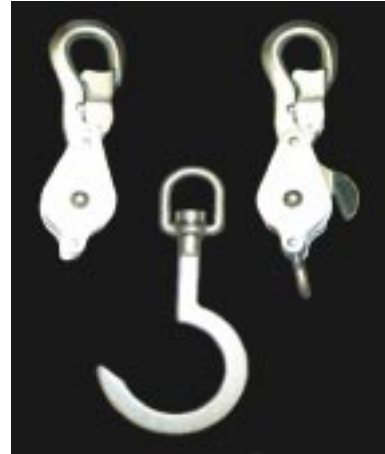

## HL-NR-S

Slack Block Set with Swivel Hook  
\* Without Rope



## HL-S25B

Slack Block Set with:  
- Swivel Hook &  
- 25' of 3/8" Yale Polyale Plus,<sup>TM</sup>  
Single Braid Rope



## HL-S25T

Slack Block Set with:  
- Swivel Hook  
- 25' of 3/8" Polypropylene Twisted Rope

\* CUSTOM LENGTHS ALSO AVAILABLE

[www.eaglelinetools.com](http://www.eaglelinetools.com)





# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## BLOCKS & HOOKS

### HL-4C

Pee Wee Block With Catch  
750 lb. Safe Load



### HL-5

Pee Wee Block  
750 lb. Safe Load



### HL-1

Swivel Snap  
750 lb. Safe Load



### HL-2

Forged Hook  
750 lb. Safe Load



### HL-3

Forged Swivel Hook  
750 lb. Safe Load



### HL-6

Handline Hook  
500 lb. Safe Load



### HL-7

Handline Hook  
500 lb. Safe Load

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## CROSS ARM MOUNT HOT ARM



**CS-72** 6' with 2 wire holders

Hot Arm, 6' x 2.5' foam filled fiberglass, for use up to and including 15kV.  
Fiberglass tested per ASTM F-711.

*Option Available:*



**CS-013** Insulator for wire holder assembly increases use up to 34.5 kV  
(Insulators sold separately.)



## POLE MOUNT HOT ARM



**CS-36** 36" with 1 wire holder

**CS-48** 48" with 2 wire holders

Pole Mount Hot Arm 32" or 48" x 2.5" foam filled fiberglass.  
Fiberglass tested per ASTM F-711.

*Option Available:*



**CS-013** Insulator for wire holder assembly increases use up to 34.5 kV.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



800-710-2976

# EAGLE LINE TOOLS

fax 513-738-0229

## REPLACEMENT HOT ARMS



- Parts are interchangeable with most other popular brands. (*See below*)
- Use your existing hardware parts for the Replacement Arm.
- Foam filled fiberglass.

### Single Phase Hot Arm-Pole Mount

<b>For use up to 15kV. Tested per ASTM F-711</b>	
<b>CS-36</b>	36" w/ pole mount end & end cap
<b>CS-36R</b>	36" w/ pole mount end & end cap

### 3 Phase Hot Arms

<b>For use up to 15kV. Tested per ASTM F-711</b>	
<b>CS-72</b>	6' w/ Saddle end cap, end cap, slide rail
<b>CS-72R</b>	6' w/ 2 end caps and slide rail


### HOT ARM PARTS




**CS-001**



**CS-016**



**CS-004**



**CS-003**



**CS-015**



**CS-013**



**CS-002**



**CS-012**



**CS-010**



**CS-011**



**CS-250**  
6' x 2.5" Fiberglass

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## BOLT CUTTERS



### Bolt Cutters with Steel Handles

- C-18S**      18" Overall Length
- C-24S**      24" Overall Length
- C-30S**      30" Overall Length
- C-36S**      36" Overall Length



### Bolt Cutters with Fiberglass Handles

**\*\*\*Handles tested at 100kV per foot**

- \* - 3/8" Capacity for high-tensile steel bolts, chain.
- Maximum hardness to be cut: Brinell 455 , Rockwell C48
- Nonmetallic reinforced ferrules.
- Vinyl hand grips.

<b>C-18F</b>	18" Overall Length - Handles 12" x 1 1/4", Weight: 5 lbs.
<b>C-006</b>	<b>18" Hot Cutter Replacement Blades</b>

* <b>C-24F</b>	24" Overall Length - Handles 16" x 1 1/4", Weight: 6 lbs.
<b>C-002</b>	<b>24" Hot Cutter Replacement Blades</b>

[www.eaglelinetools.com](http://www.eaglelinetools.com)



## EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

### TOOL BOARDS



#### Tool Board, A-10

Tool Board includes:

- Black Cordura pouch, 10 1/2" x 8" x 4"
- Leather, 4-pocket pouch
- Leather, 1-pocket pouch
- Hammer Holder
- Tool Loops
- Designed to fit lined and unlined buckets.
- Dimensions: 21 1/4" x 17 3/4"
- Weight: 5 lbs.

**Custom Tool Boards are available.**

We can assemble the tool boards to your specifications!

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## TEMPORARY GROUND ROD



### G-04

#### Impact Driven or Manual Use

- 5/8" Diameter x 72" L
- Can be installed and removed with a hydraulic impact wrench.
- Quick installation and removal by an impact wrench saves time and energy.
- In cases where an impact wrench cannot be used, a "T" handle can be easily installed for manual installation.

### G-06

#### Temporary Ground Rod

- Manual Installation Only
- 5/8" Diameter x 72" L



---

[www.eaglelinetools.com](http://www.eaglelinetools.com)

---



# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229

## SS-3000 - Stringing System

The EAGLE LINE TOOLS complete stringing eliminates the need for finger lines. This prevents the need to tie and untie the pilot lines. This system saves time by preventing extra climbs and keeps the pilot lines safe from vandalism. The complete system consists of a controller (SS-050), a lightweight reel (SS-049L Patent Pending) with 3000' of 5/16" Poly Plus rope available in Black, Red, Green, or Blue. The system may also be purchased individually. A complete list of parts are available and are compatible with most other brands.



### Warranty

EAGLE LINE TOOLS warrants this product to be free from defects in material and workmanship for a period of one year from the date of the original purchase. This product must be installed, operated and used according to EAGLE LINE TOOLS written instructions. Normal wear and tear, damage from abuse/neglect, or alterations are not covered under this warranty. This warranty is null and void if instructions and operating procedures are not followed.





# EAGLE LINE TOOLS

800-710-2976

fax 513-738-0229



## SS-050 Controller

The EAGLE “Stringing System” controller can be mounted on either wood or non-wood poles with a leg screw or with an adjustable chain tightener. The braking system allows for continued tension on the pilot line during installation. The system has an adjustable brake to set tension to the required specifications. The controller weighs 55 lbs.

## SS-049L Light-Weight Reel\*

The EAGLE Light-Weight Reel only weighs 60 lbs. without rope and 133 lbs. with rope. The reel holds 3000’ of 5/16” Poly Plus, 12 stranded pilot line. The pilot line is available in Black, Red, Blue, and Green. The reel can easily be repaired in the field should it become damaged due to a resulting fall. The minimum breaking strength of the rope is 3600 lbs. and 2.8 lbs. per 100 ft.

The Poly Plus rope is constructed of high tenacity polyester and finished with a coating to optimize abrasion of the rope. This rope has a longer void in the middle and makes it easier to splice.

\*Patent Pending



## SS-51AX Extension Axle

The EAGLE Extension Axle is made of cast iron and can be used to take up the pilot line with a line truck winch. This eliminates the need for a hydraulic rewinder. This axle weighs 24 lbs. and the dimensions are 19 1/4”L x 3 3/4”W.

[www.eaglelinetools.com](http://www.eaglelinetools.com)



# EAGLE LINE TOOLS

EAGLE	KLEIN	HK PORTER	HASTINGS	AB CHANCE	LITTLE MULE
PG-1202	1656-20				
PG-1203	1656-30				
PG-1204	1656-40				
PG-1302	1604-20				
PG-1302L	1604-20L				
PG-1402	1685-20				
PG-1403	1685-31				
PG-1507	1684-74				
PG-1702	1613-30				
PG-1704	1613-40				
PG-1804					LMG4500
PG-1806					LMG4800
HL-1	470				
HL-2	258				
HL-3	259				
HL-4C	268				
HL-5	267				
HL-6			P100060	M1849	
HL-60T			3555		
HL-80T			3556		
HL-100T			3557		
HL-S25T	1802-30S S/R				
HLB-1000			3550	PSC4033478	
HLB-1000MH			3550-1		
HLB-1000NH			3553		
CS-36			5038	T400-1940	
CS-72			5006	H4800-72	
G-06			4370	G3370	
C-18F		0090FC	10-467		
C-18S		0090SC	10-450		
C-24F		0190FC	10-667	PSC4033475	
C-24S		0190MC	10-600		
C-30S		0290MC	10-750		
C-36S		0390MC	10-900		
A-10			05-829		